



MODEL 75-KFS-SS

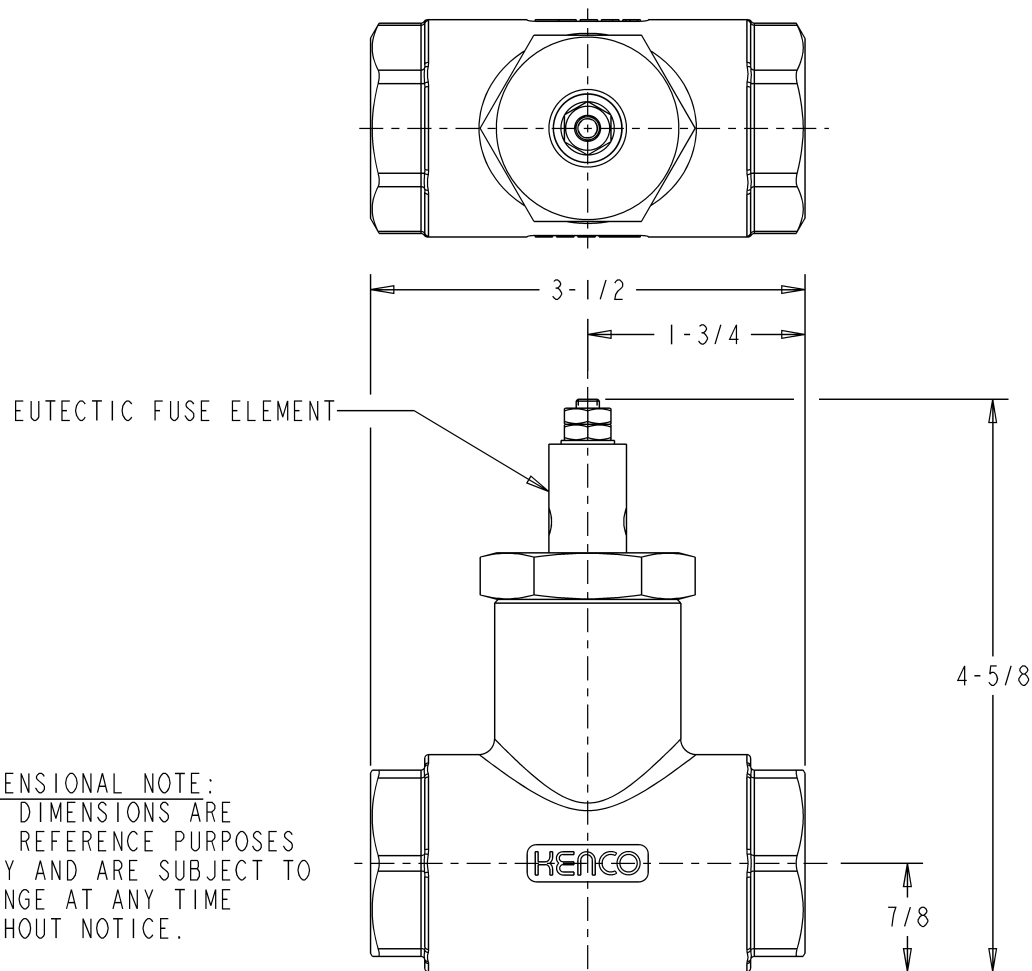

DIMENSIONAL NOTE:
ALL DIMENSIONS ARE
FOR REFERENCE PURPOSES
ONLY AND ARE SUBJECT TO
CHANGE AT ANY TIME
WITHOUT NOTICE.

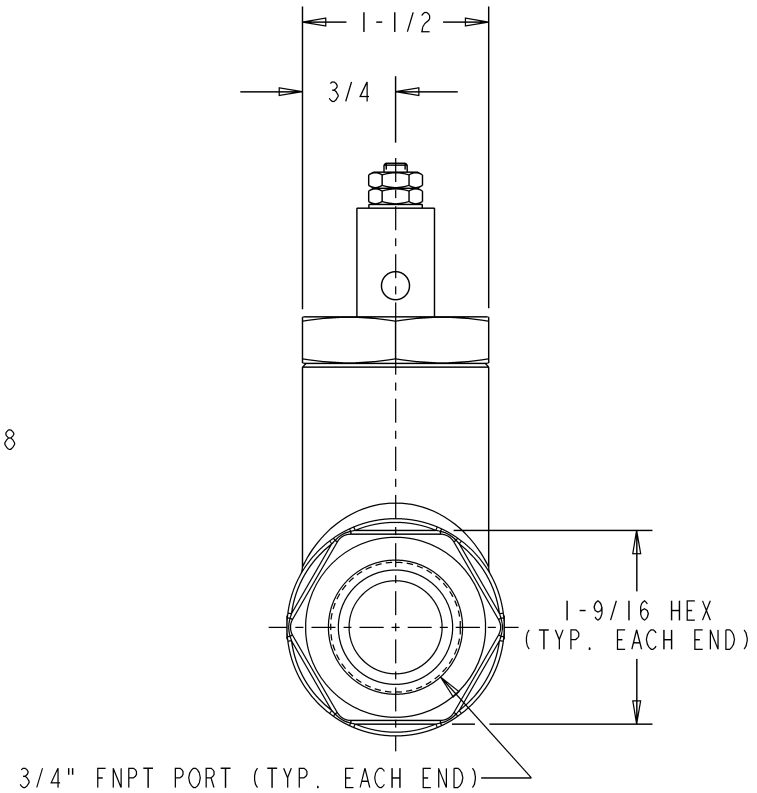

MATERIALS OF CONSTRUCTION:
ALL 316 STAINLESS STEEL WITH
17-7 PH STAINLESS STEEL ACTUATOR
SPRING AND PROPRIETARY EUTECTIC
FUSE ELEMENT ALLOY.

			DIM'S IN INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED.		Kenco ENGINEERING Tulsa, Oklahoma USA		MATERIAL:	SEE B/M
A	7/19/11	BRC	RELEASED		TITLE:		RELEASE LEVEL:	RELEASED
	000085	RDM			VALVE, FIRESAFE, MODEL 75-KFS-SS		DRAWING CREATED IN PRO/ENGINEER	
REV.	DATE	DRN.	DESCRIPTION		DRN. BY:	BRC	SCALE:	1.000
	ECN	CHKD.			CHKD. BY:	RDM	REVISION:	A
			MACH FILLT RAO-.031"		DATE:	7/19/11	SHEET 1 OF 3	DRAWING NUMBER
			125 MAX. FINISH ALL MACHINED SURFACES.		63198			

PROPRIETARY: THIS DRAWING AND THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO KENCO ENGINEERING CO. AND SHALL NOT BE REPRODUCED, COPIED, OR DISCLOSED IN WHOLE OR IN PART, OR USED FOR MANUFACTURE OR FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF KENCO ENGINEERING.