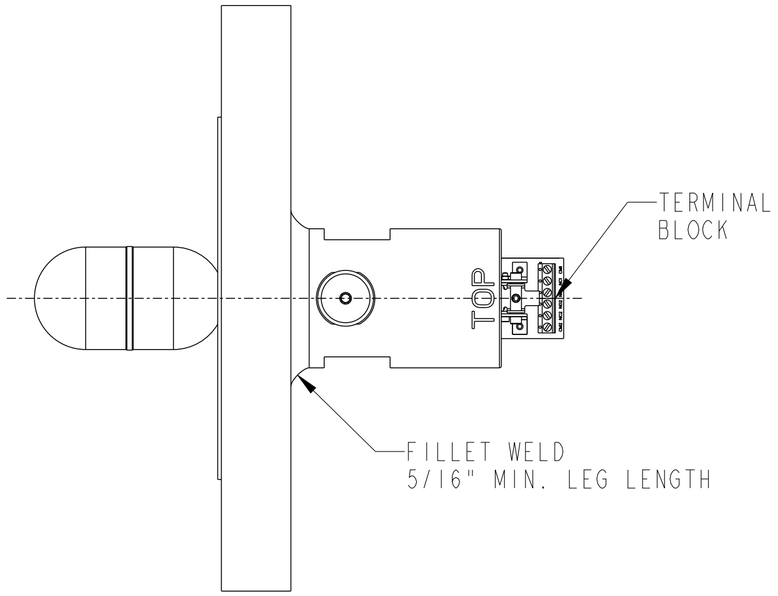

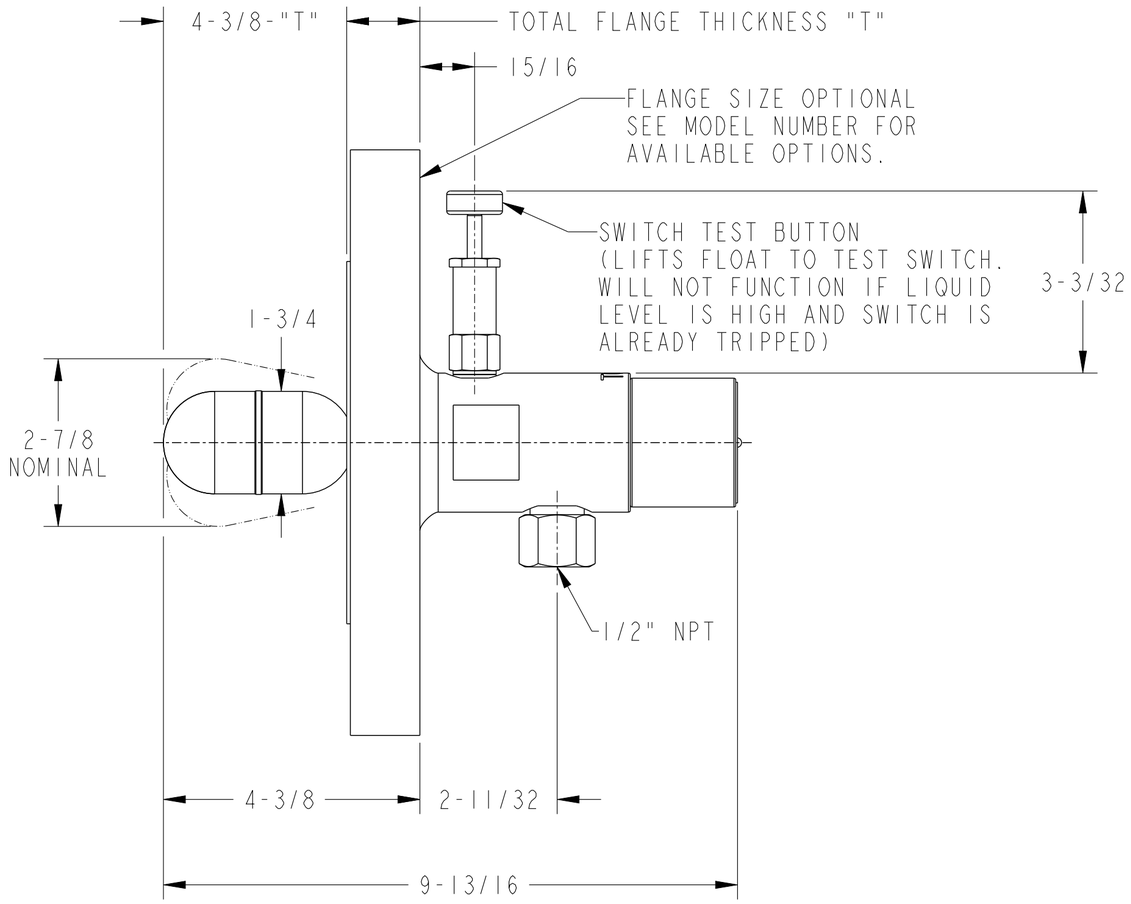

FLANGE SHOWN IS ONE OF MANY OPTIONS AVAILABLE AND MAY DIFFER IN APPEARANCE FROM ACTUAL FLANGE USED. THE MODEL NUMBER WILL DETERMINE THE FLANGE.

MODEL NUMBER

KEFS-[ ][ ]-DPDT4-S6-TB

FLANGE SIZE	FLANGE RATING
3 = 3" FLANGE	A = 150 LB. R.F.
4 = 4" FLANGE	B = 300 LB. R.F.
6 = 6" FLANGE	C = 600 LB. R.F.
8 = 8" FLANGE	D = 900 LB. R.F.
	E = 1500 LB. R.F.
	F = 2500 LB. R.F.

EXAMPLE: THE MODEL NUMBER FOR A FLANGED KEFS WITH A 4" 300 LB. R.F. 316 S.S. FLANGE WOULD BE "KEFS-4B-DPDT4-S6-TB"

SPECIFICATIONS:

SWITCH RATING:	4A @ 125/250 VAC, 5A @ 30 VDC
CONTACT TYPE:	DPDT
MINIMUM OPERATING S.G.:	.53
MAX. WORKING PRESSURE:	FULL VACUUM TO FLANGE RATING (2000 PSI MAX)
WETTED MATERIALS:	316 S.S.
FLANGE MATERIAL:	316 S.S.

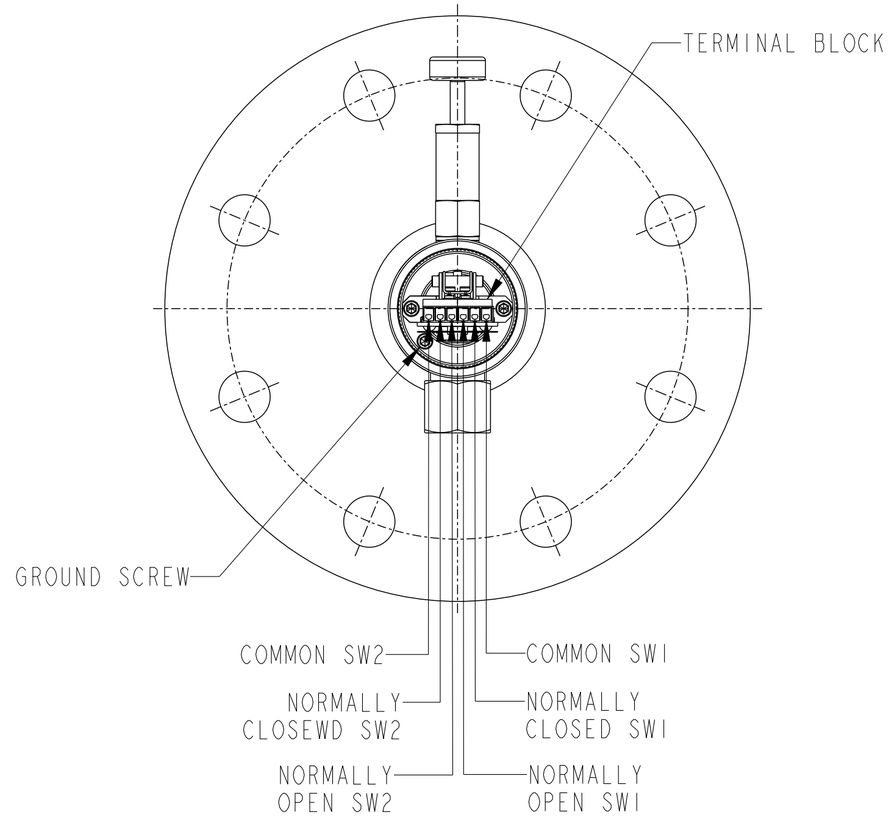

REV.	DATE	DRN.	DESCRIPTION
A	7/31/24	BRC	RELEASED
	N/A	DS	
	ECN	CHKD.	

PROPRIETARY: THIS DRAWING AND THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO KENCO ENGINEERING CO. AND SHALL NOT BE REPRODUCED, COPIED, OR DISCLOSED IN WHOLE OR IN PART, OR USED FOR MANUFACTURE OR FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF KENCO ENGINEERING.

DIM'S IN INCHES
TOLERANCES UNLESS OTHERWISE SPECIFIED.
ANGULAR ±1/2°
FRACTIONAL ±1/64"
(X.X) ±0.015"
(X.XX) ±0.010"
(X.XXX) ±0.005"
MACH FILLET RAD-.031"
125 MAX. FINISH, ALL MACHINED SURFACES.

KENCO ENGINEERING
Tulsa, Oklahoma USA

MATERIAL:				
RELEASE LEVEL:	RELEASED			
DRAWING CREATED IN PRO/ENGINEER				
TITLE: SWITCH, ELECTRIC FLOAT, 2000 PSI 4A DPDT FLANGED KEFS-TB (OUTLINE DRAWING)				
DRN. BY:	BRC	SCALE:	0.500	DRAWING NUMBER
CHKD. BY:	DS	REVISION:	A	94662
DATE:	7/31/24	SHEET 1 OF 3		