
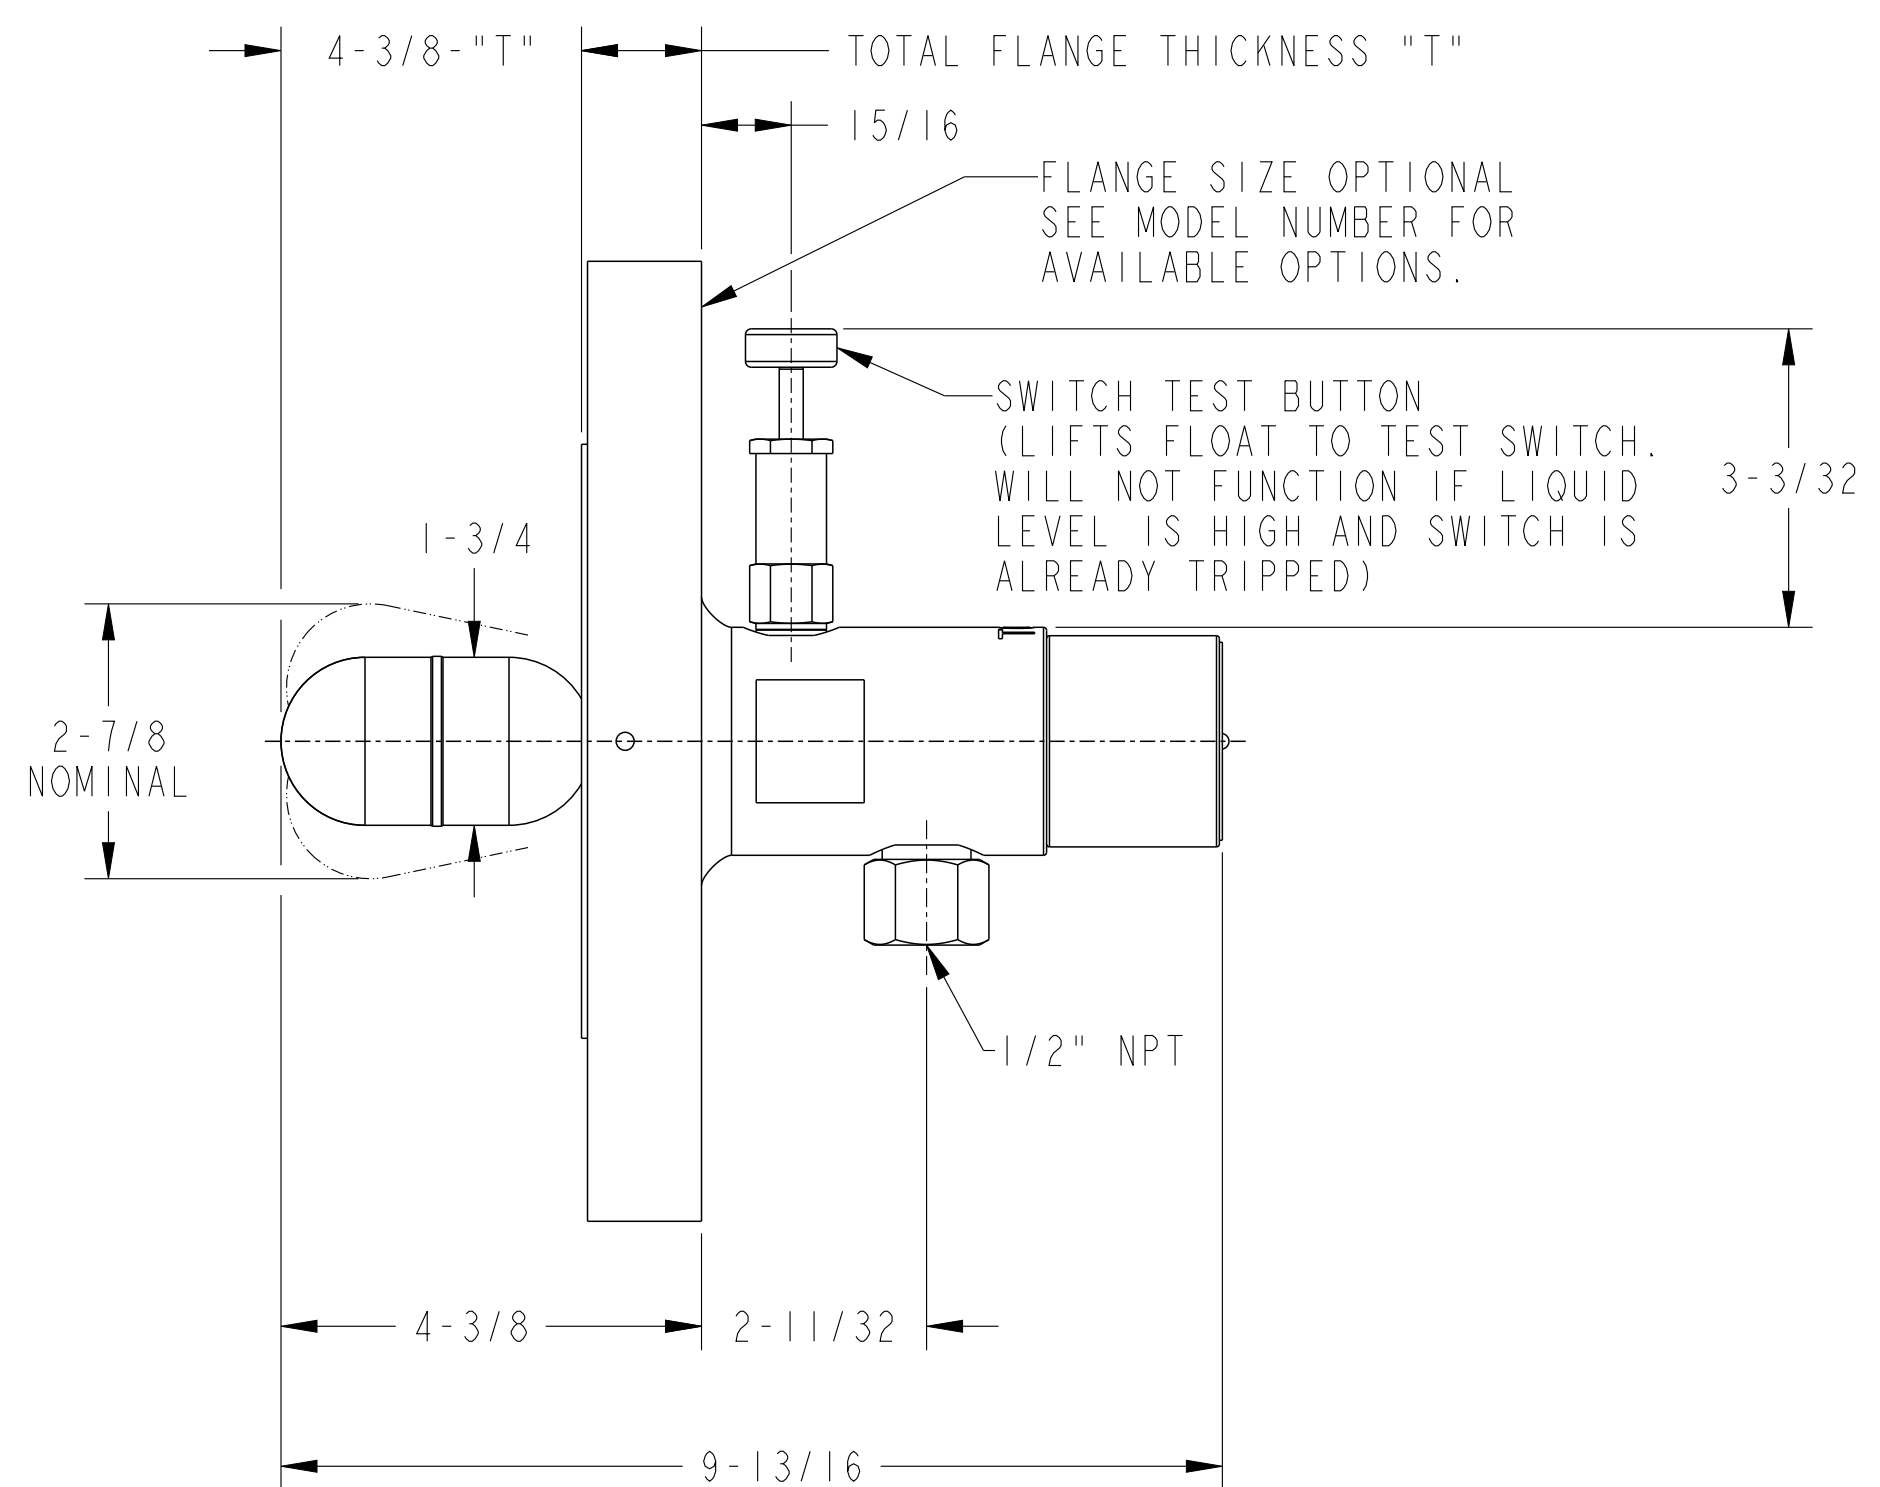


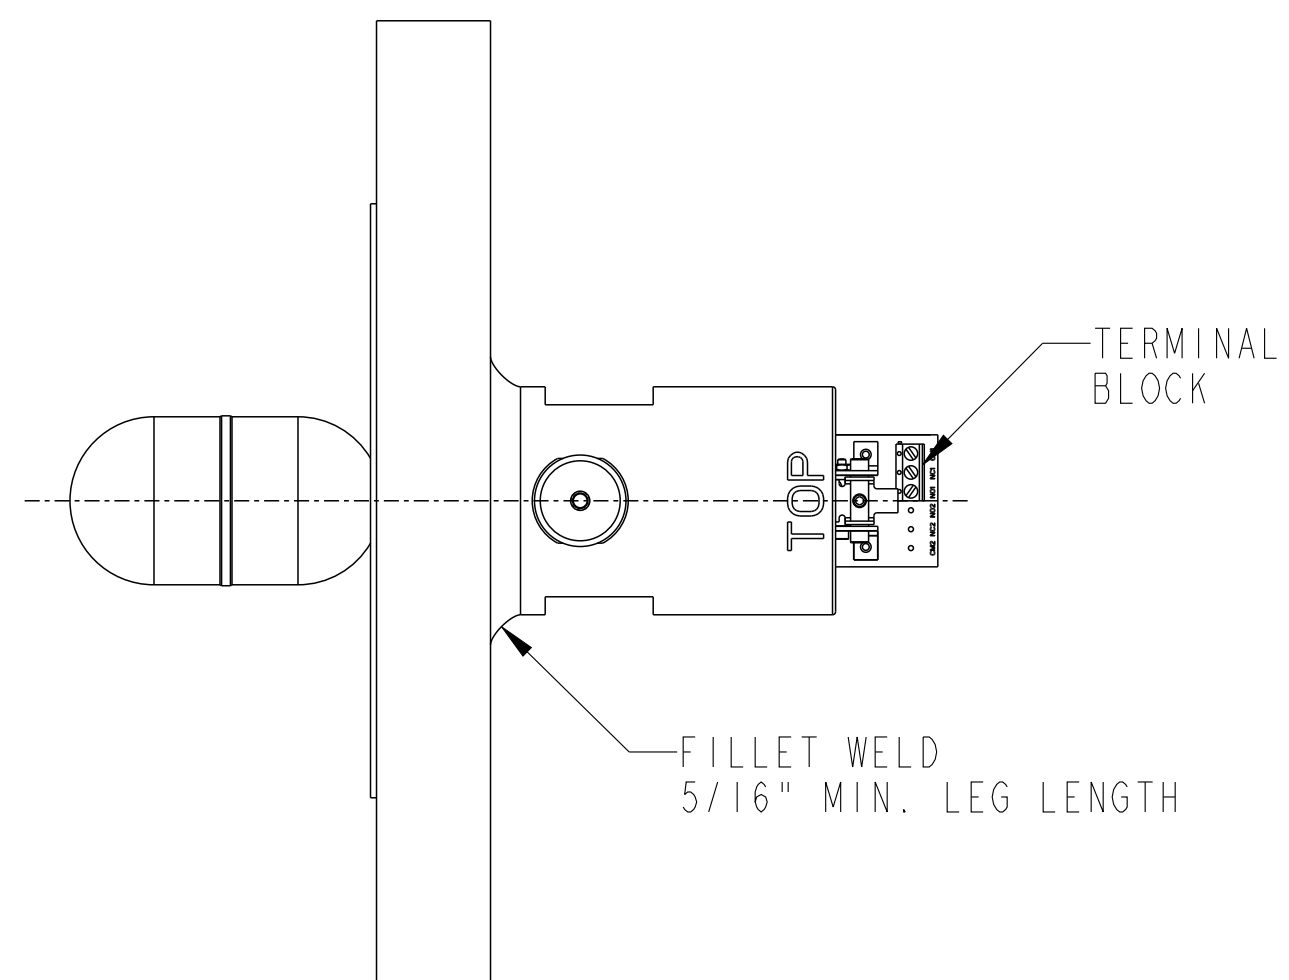

FLANGE SHOWN IS ONE OF MANY OPTIONS AVAILABLE AND MAY DIFFER IN APPEARANCE FROM ACTUAL FLANGE USED. THE MODEL NUMBER WILL DETERMINE THE FLANGE.

MODEL NUMBER
KEFS- -SPDT5-S6-TB

FLANGE SIZE FLANGE RATING


3 = 3" FLANGE	A = 150 LB. R.F.
4 = 4" FLANGE	B = 300 LB. R.F.
6 = 6" FLANGE	C = 600 LB. R.F.
8 = 8" FLANGE	D = 900 LB. R.F.
	E = 1500 LB. R.F.
	F = 2500 LB. R.F.

EXAMPLE: THE MODEL NUMBER FOR A FLANGED KEFS WITH A 4" 300 LB. R.F. 316 S.S. FLANGE WOULD BE "KEFS-4B-SPDT5-S6-TB"

SPECIFICATIONS:

SWITCH RATING: 5A @ 125/250 VAC
5A @ 30 VDC

CONTACT TYPE: SPDT
MINIMUM OPERATING S.G.: .53
MAX. WORKING PRESSURE: 2000 PSI
WETTED MATERIALS: 316 S.S.
FLANGE MATERIAL: 316 S.S.

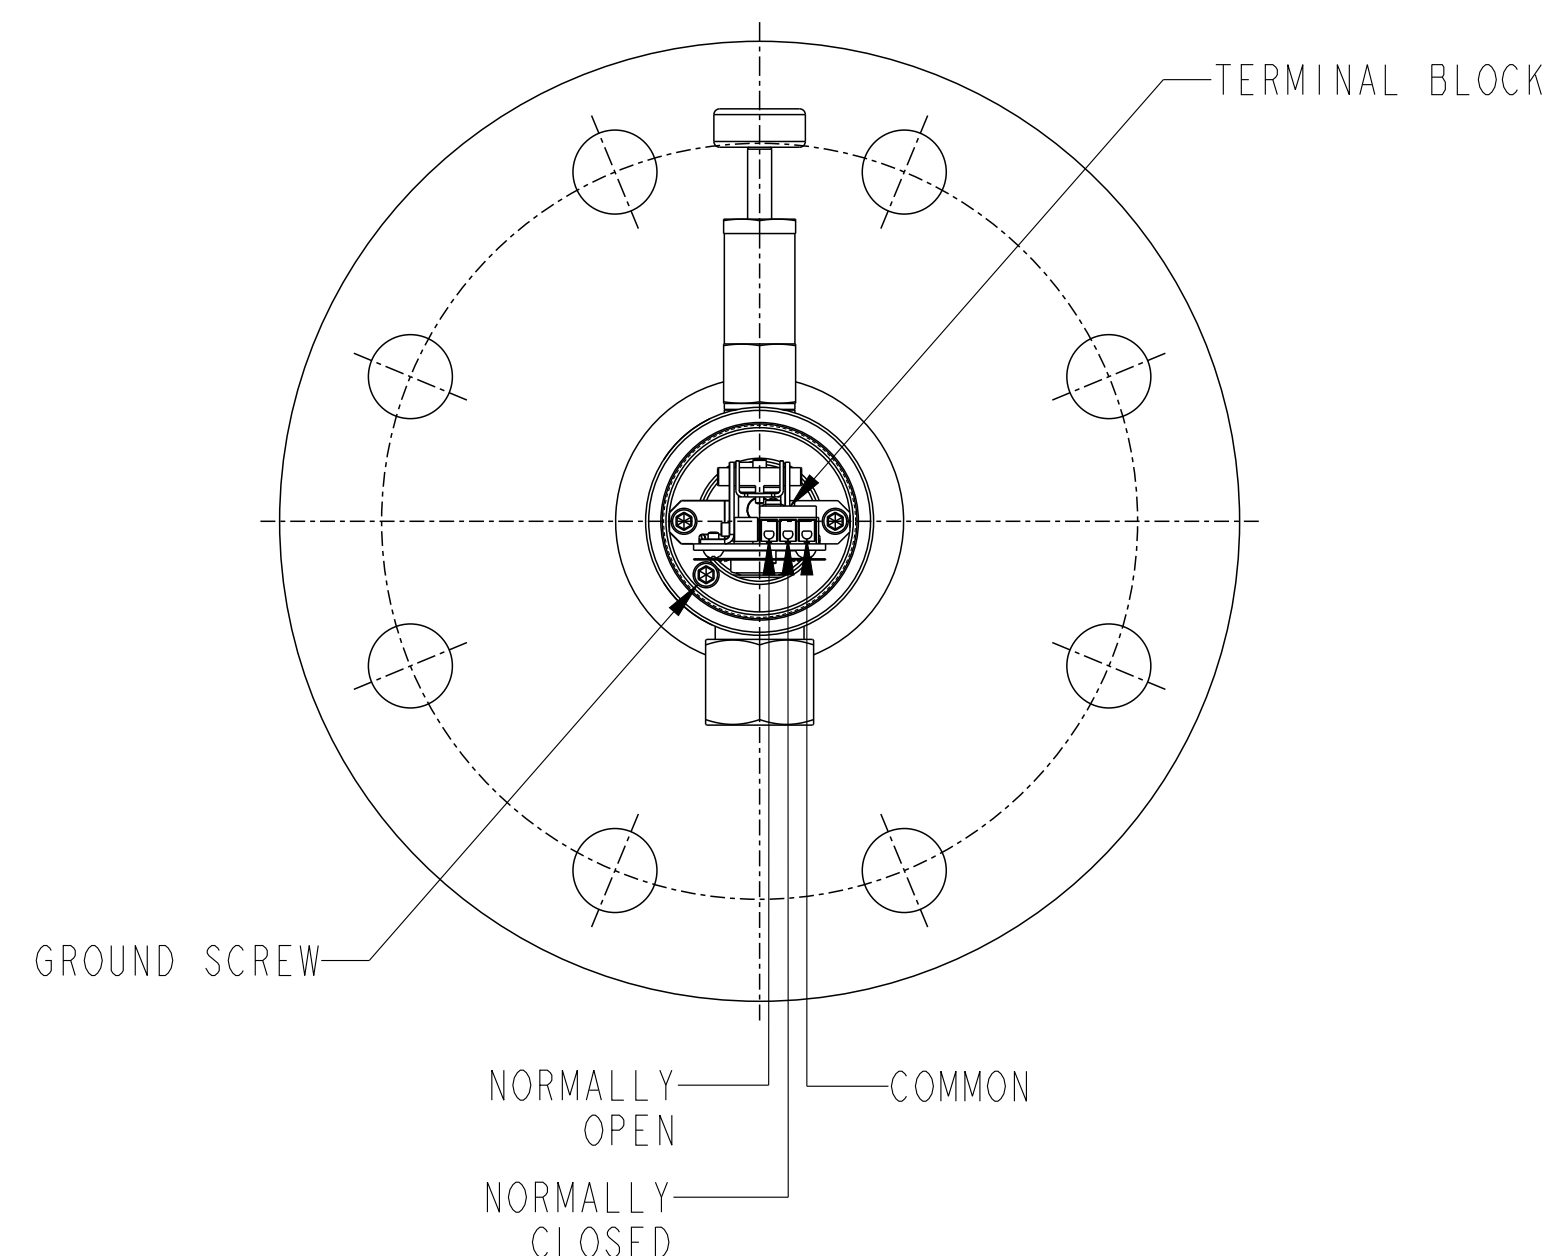

			DIM'S IN INCHES			KENCO		MATERIAL:		
			TOLERANCES UNLESS OTHERWISE SPECIFIED.			ENGINEERING		RELEASE LEVEL: RELEASED		
						Tulsa, Oklahoma, USA		DRAWING CREATED IN PRO/ENGINEER		
A			RELEASED			TITLE:				
7/31/24			BRC			SWITCH, ELECTRIC FLOAT, 2000 PSI 5A SPDT FLANGED KEFS-TB (OUTLINE DRAWING)				
N/A			DS			DRN. BY: BRC				
DATE			DRN.			SCALE: 0.500				
ECN			CHKD.			REVISION: A				
			DESCRIPTION			DRAWING NUMBER				
						94660				
						DATE: 7/31/24				
						SHEET 1 OF 3				