
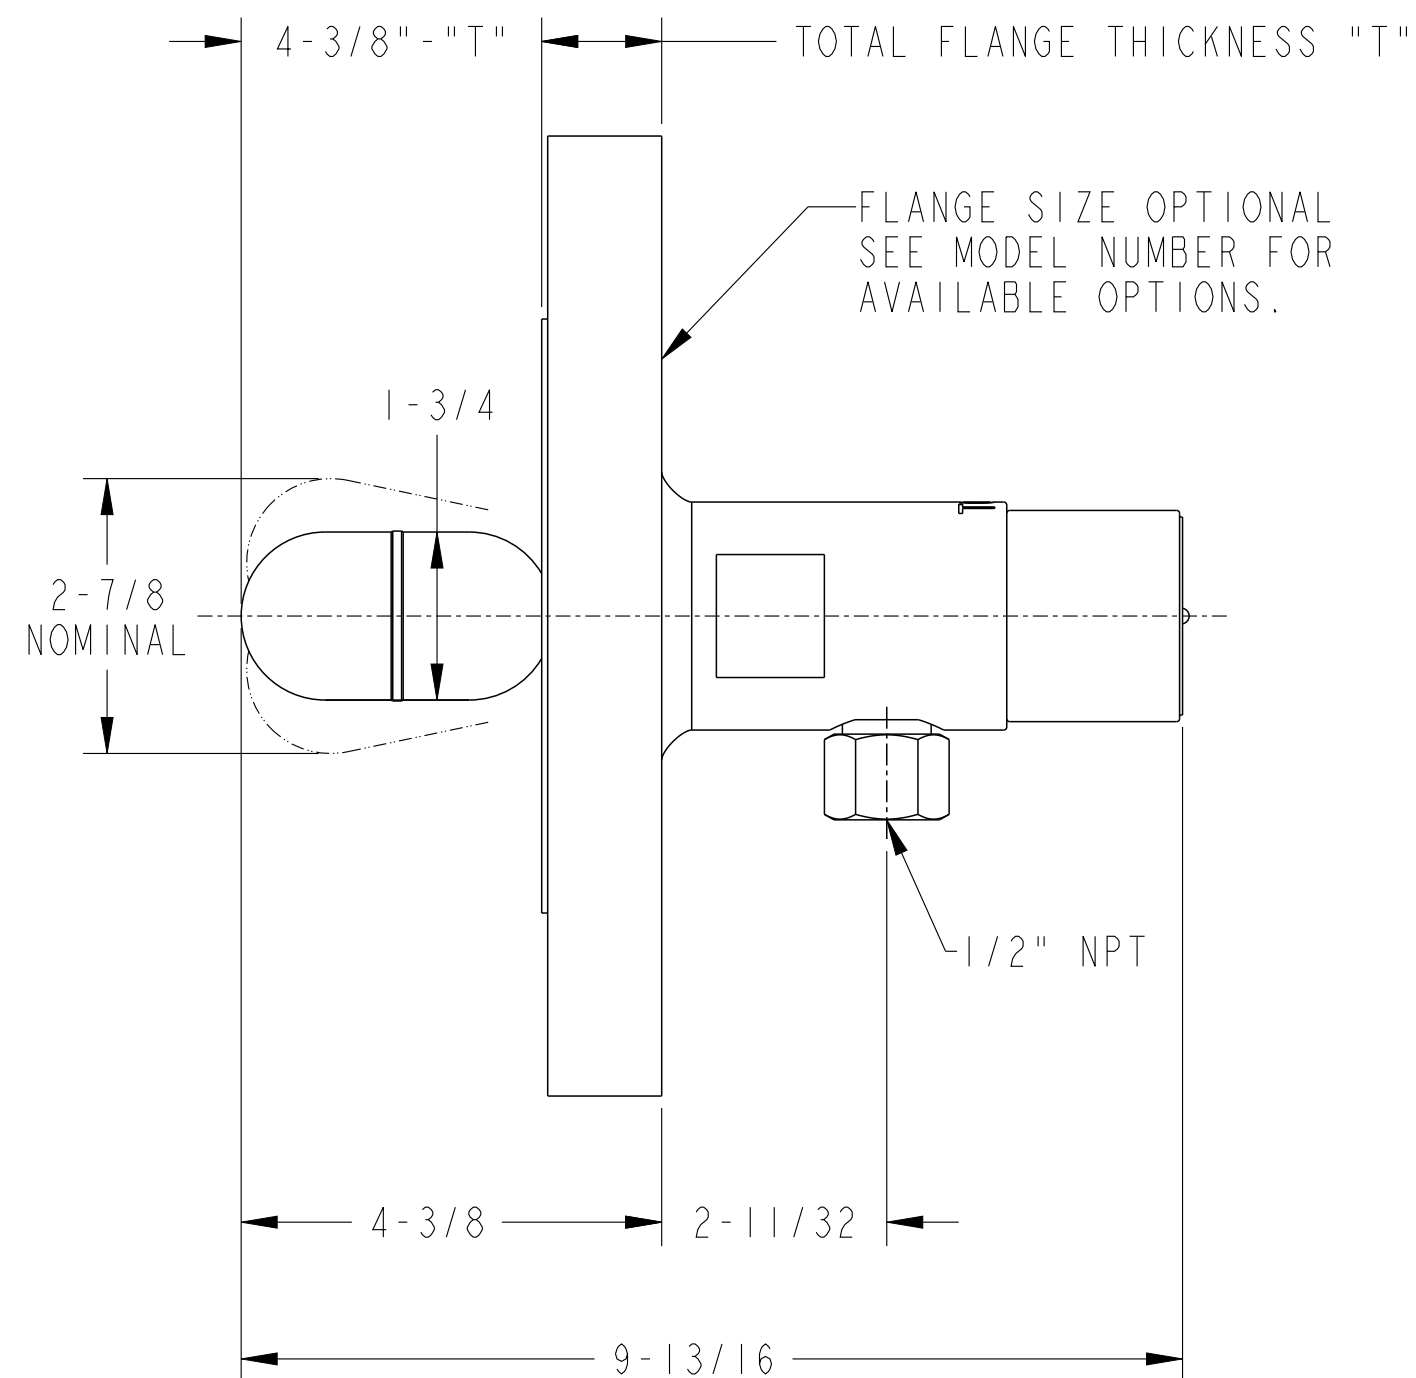


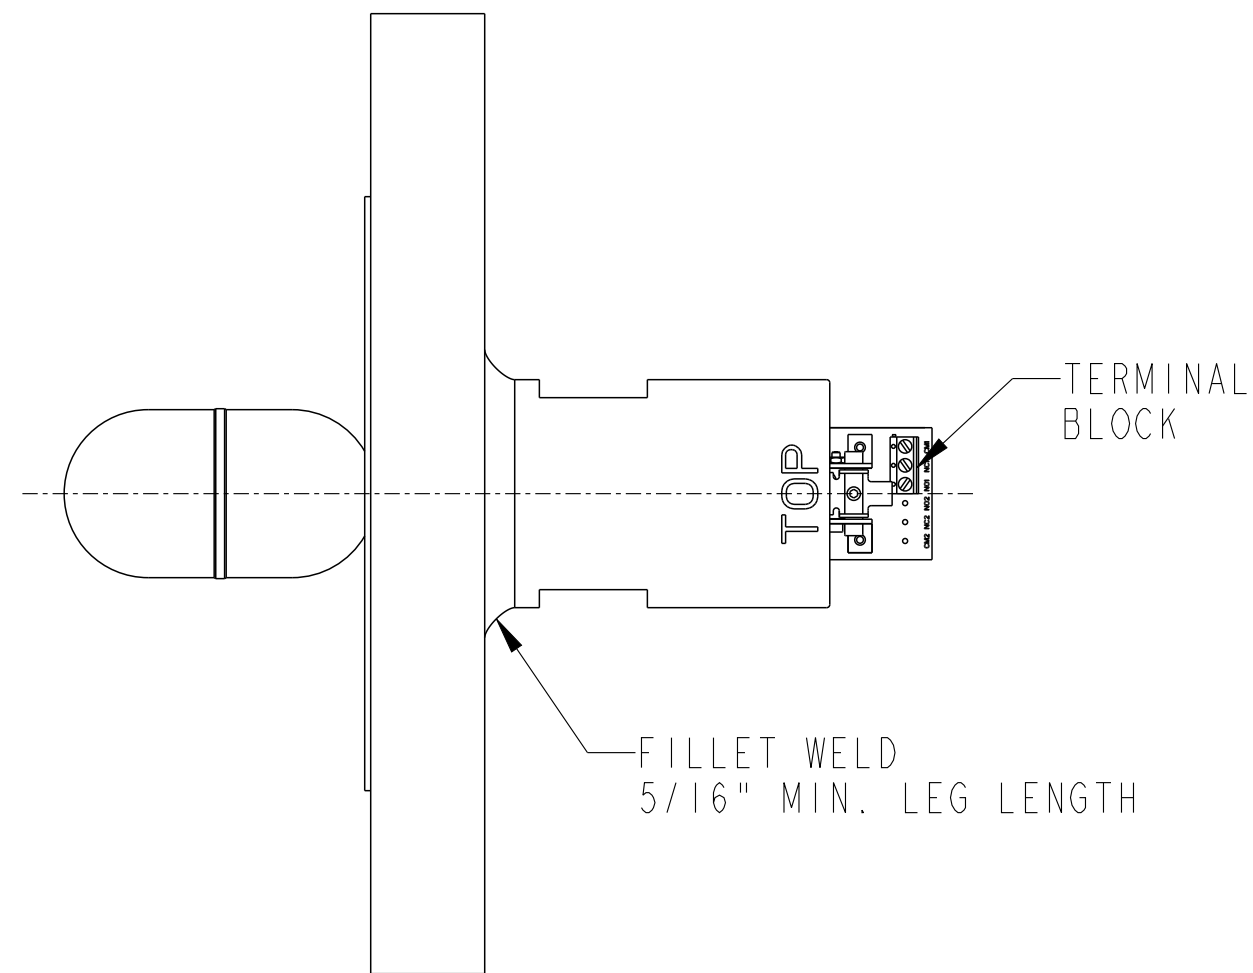


FLANGE SHOWN IS ONE OF MANY OPTIONS AVAILABLE AND MAY DIFFER IN APPEARANCE FROM ACTUAL FLANGE USED. THE MODEL NUMBER WILL DETERMINE THE FLANGE.

MODEL NUMBER	
KEFS-	-SPDT8-S6
FLANGE SIZE	FLANGE RATING
3 = 3" FLANGE	A = 150 LB. R.F.
4 = 4" FLANGE	B = 300 LB. R.F.
6 = 6" FLANGE	C = 600 LB. R.F.
8 = 8" FLANGE	D = 900 LB. R.F.
	E = 1500 LB. R.F.
	F = 2500 LB. R.F.

EXAMPLE: THE MODEL NUMBER FOR A FLANGED KEFS WITH A 4" 300 LB. R.F. 316 S.S. FLANGE WOULD BE "KEFS-4B-SPDT8-S6"

SPECIFICATIONS:

SWITCH RATING: 8A @ 125/250 VAC
12A @ 125 VAC RESISTIVE
CONTACT TYPE: SPDT
MINIMUM OPERATING S.G.: .53
MAX. WORKING PRESSURE: 2000 PSI
WETTED MATERIALS: 316 S.S.
FLANGE MATERIAL: 316 S.S.

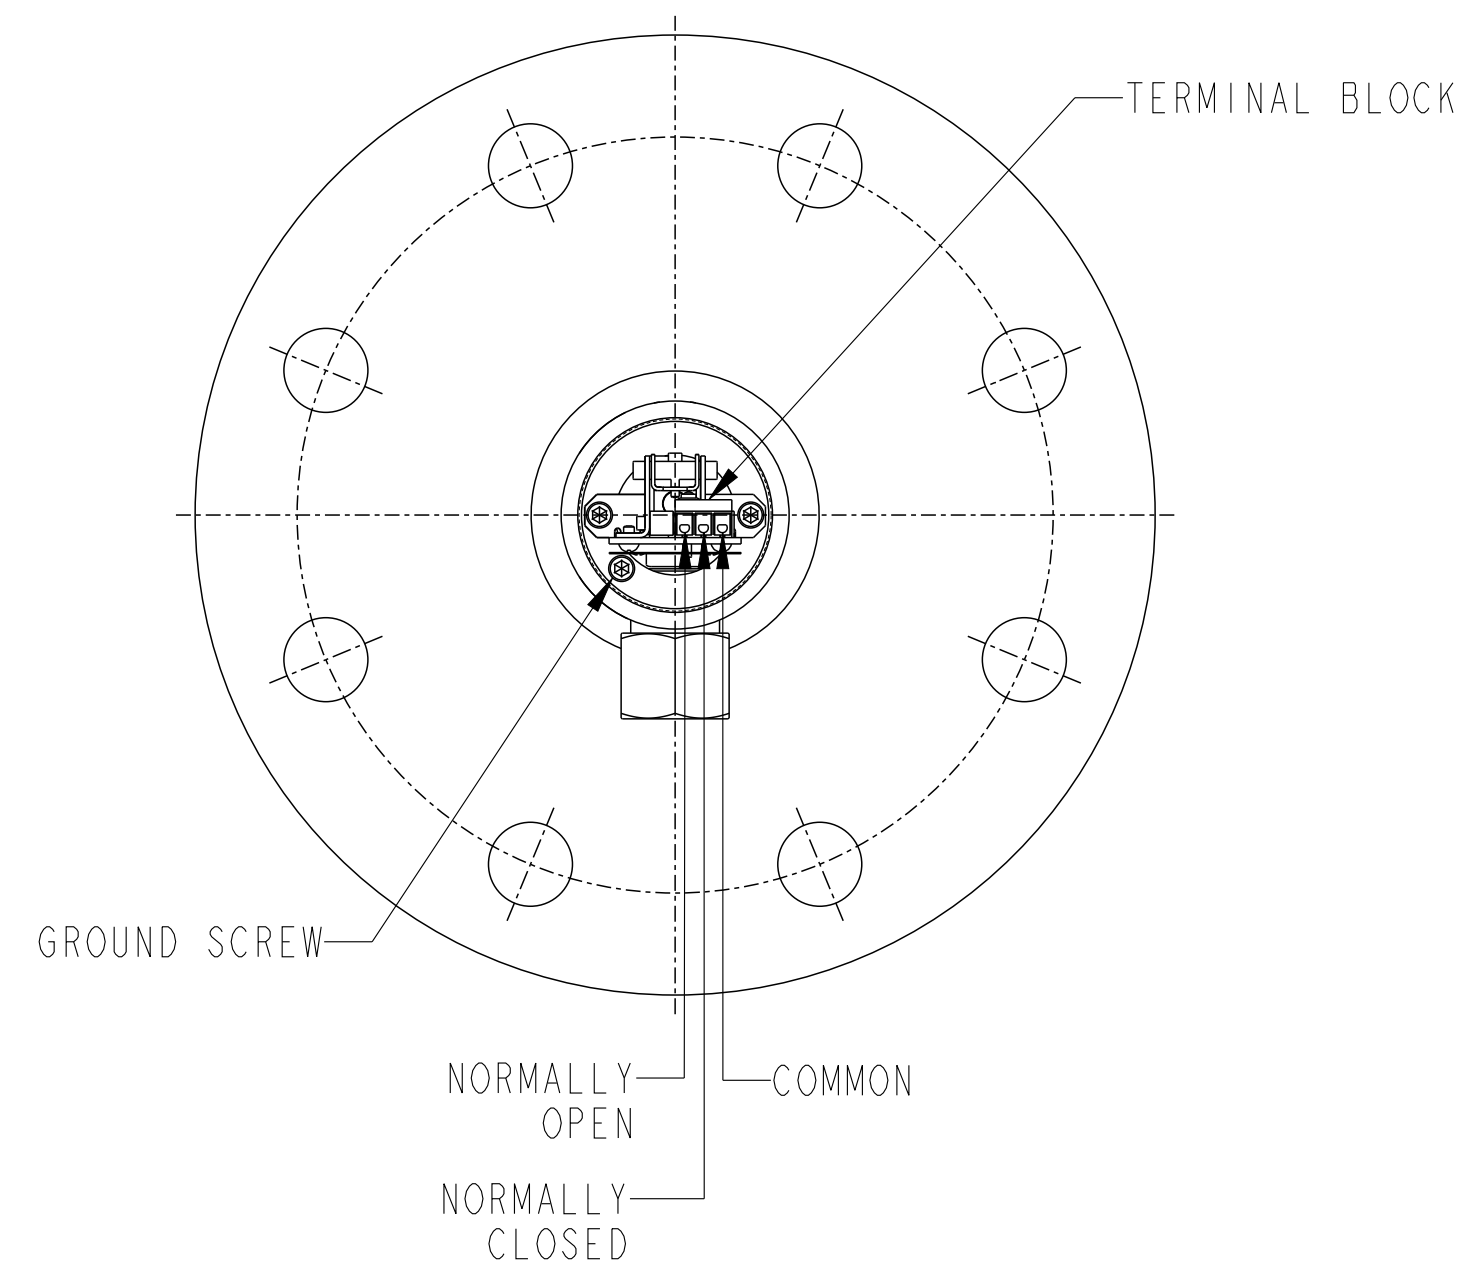

DIM'S IN INCHES				TOLERANCES UNLESS OTHERWISE SPECIFIED.		Kenco ENGINEERING		MATERIAL:	
RELEASED				RELEASED		Tulsa, Oklahoma, USA		RELEASE LEVEL: RELEASED	
DESCRIPTION				TITLE:		DRAWING CREATED IN PRO/ENGINEER			
A				8/02/24		BRC			
REV.				DATE		DRN.			
				ECN		CHKD.			
PROPRIETARY: THIS DRAWING AND THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO KENCO ENGINEERING CO. AND SHALL NOT BE REPRODUCED, COPIED, OR DISCLOSED IN WHOLE OR IN PART, OR USED FOR MANUFACTURE OR FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF KENCO ENGINEERING.				ANGULAR		±1/2"			
				FRACTIONAL		±1/64"			
				(X.X)		±0.015"			
				(X.XX)		±0.010"			
				(X.XXX)		±0.005"			
				MACH FILLET RND.		.031"			
				125 MAX. FINISH, ALL MACHINED SURFACES.					
				DRN. BY:		BRC		SCALE: 0.500	
				CHKD. BY:		DS		REVISION: A	
				DATE:		8/02/24		SHEET 1 OF 3	
								DRAWING NUMBER 94663	