
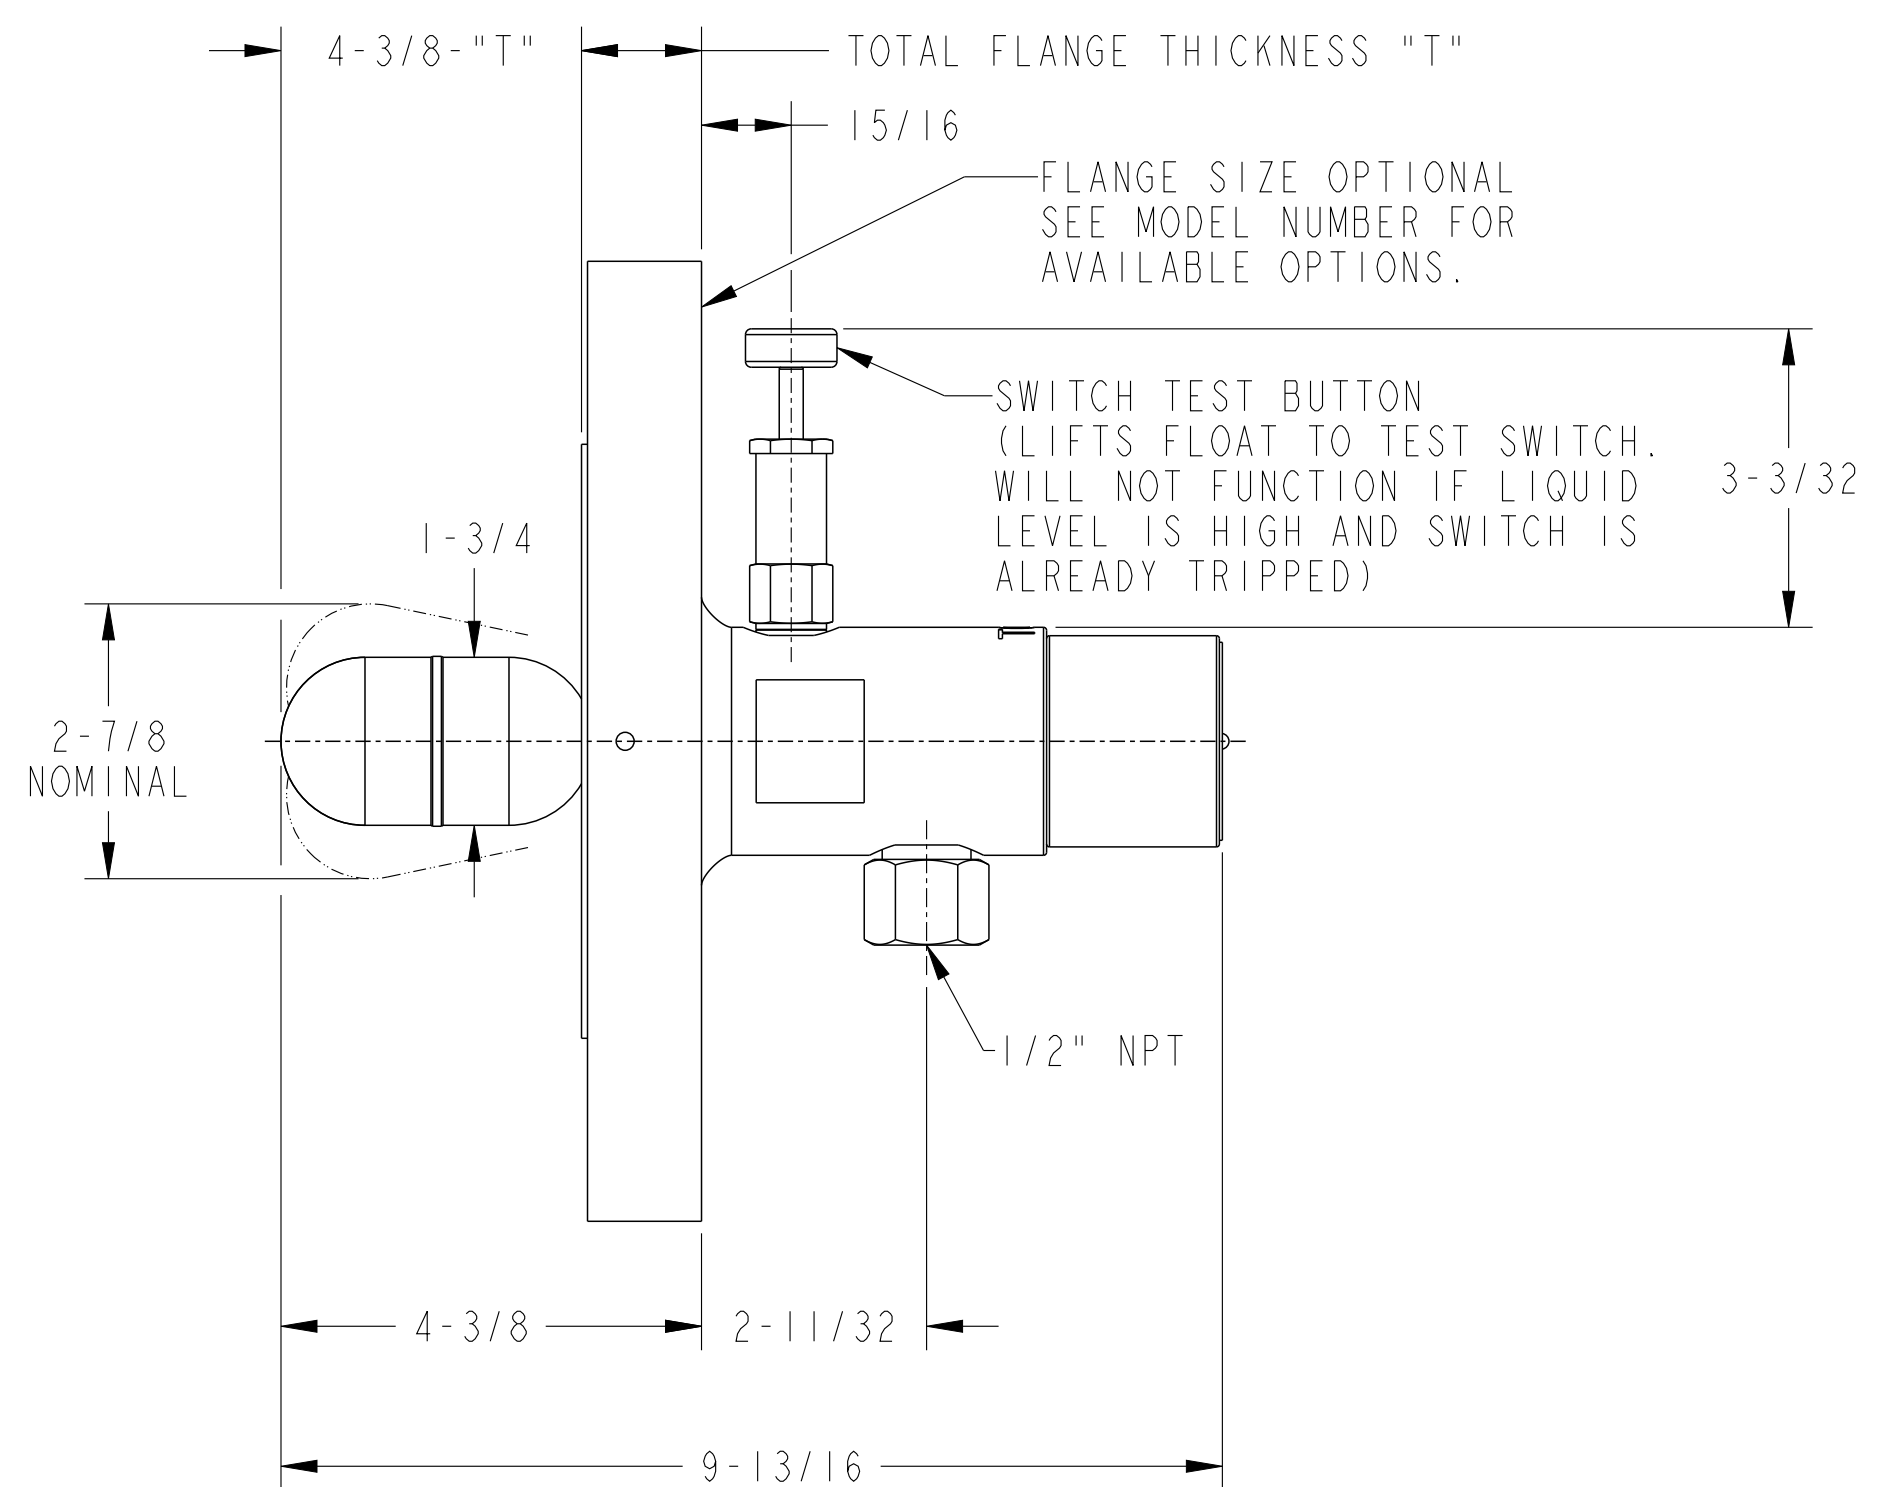


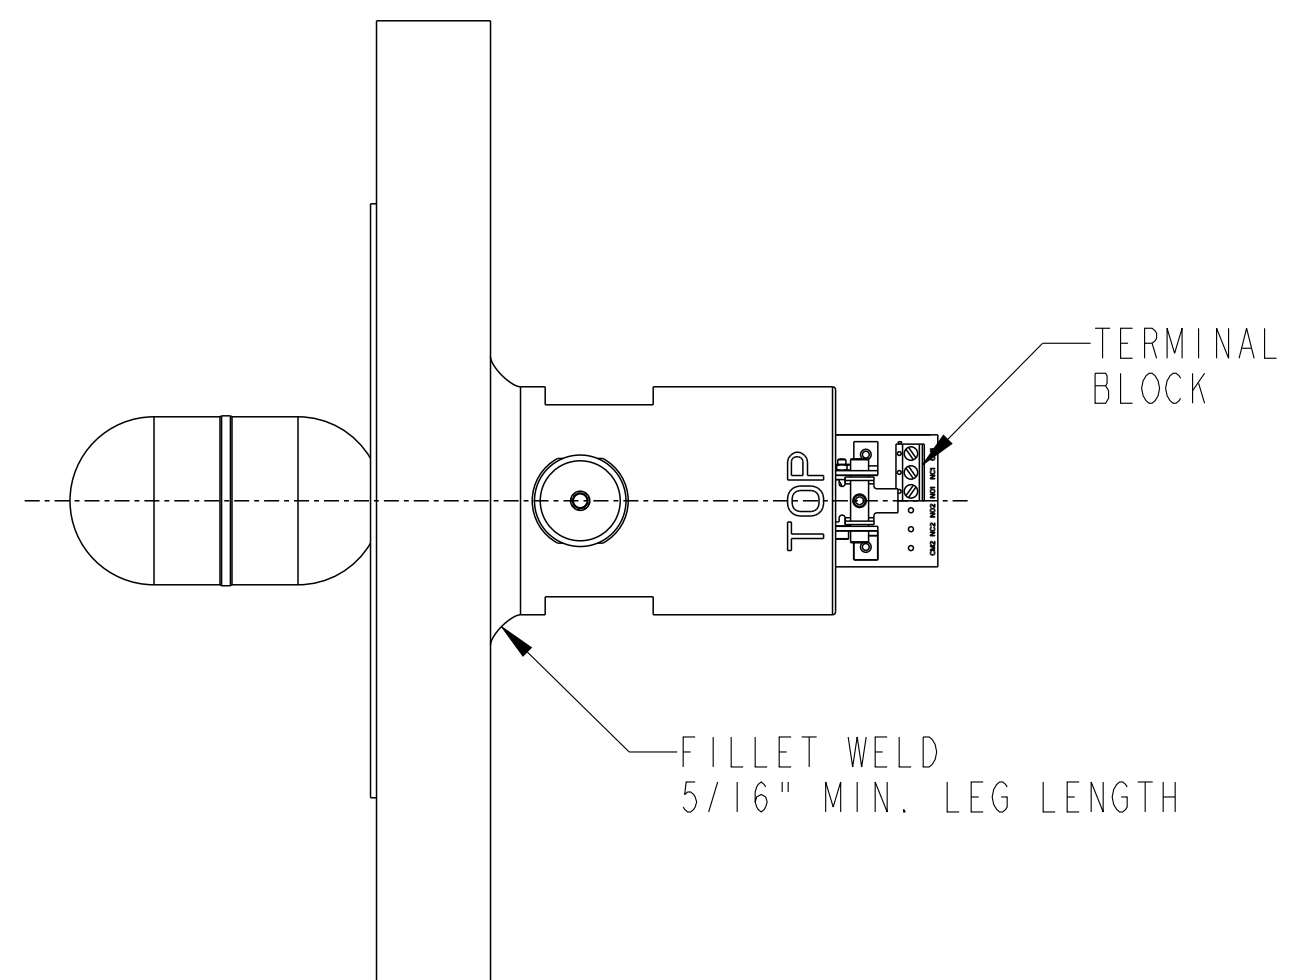

FLANGE SHOWN IS ONE OF MANY OPTIONS AVAILABLE AND MAY DIFFER IN APPEARANCE FROM ACTUAL FLANGE USED. THE MODEL NUMBER WILL DETERMINE THE FLANGE.

MODEL NUMBER

KEFS- [] -SPDT8-S6-TB


FLANGE SIZE FLANGE RATING

3 = 3" FLANGE	A = 150 LB. R.F.
4 = 4" FLANGE	B = 300 LB. R.F.
6 = 6" FLANGE	C = 600 LB. R.F.
8 = 8" FLANGE	D = 900 LB. R.F.
	E = 1500 LB. R.F.
	F = 2500 LB. R.F.

EXAMPLE: THE MODEL NUMBER FOR A FLANGED KEFS WITH A 4" 300 LB. R.F. 316 S.S. FLANGE WOULD BE "KEFS-4B-SPDT8-S6-TB"

SPECIFICATIONS:

SWITCH RATING: 8A @ 125/250 VAC
12A @ 125 VAC RESISTIVE
CONTACT TYPE: SPDT
MINIMUM OPERATING S.G.: .53
MAX. WORKING PRESSURE: 2000 PSI
WETTED MATERIALS: 316 S.S.
FLANGE MATERIAL: 316 S.S.

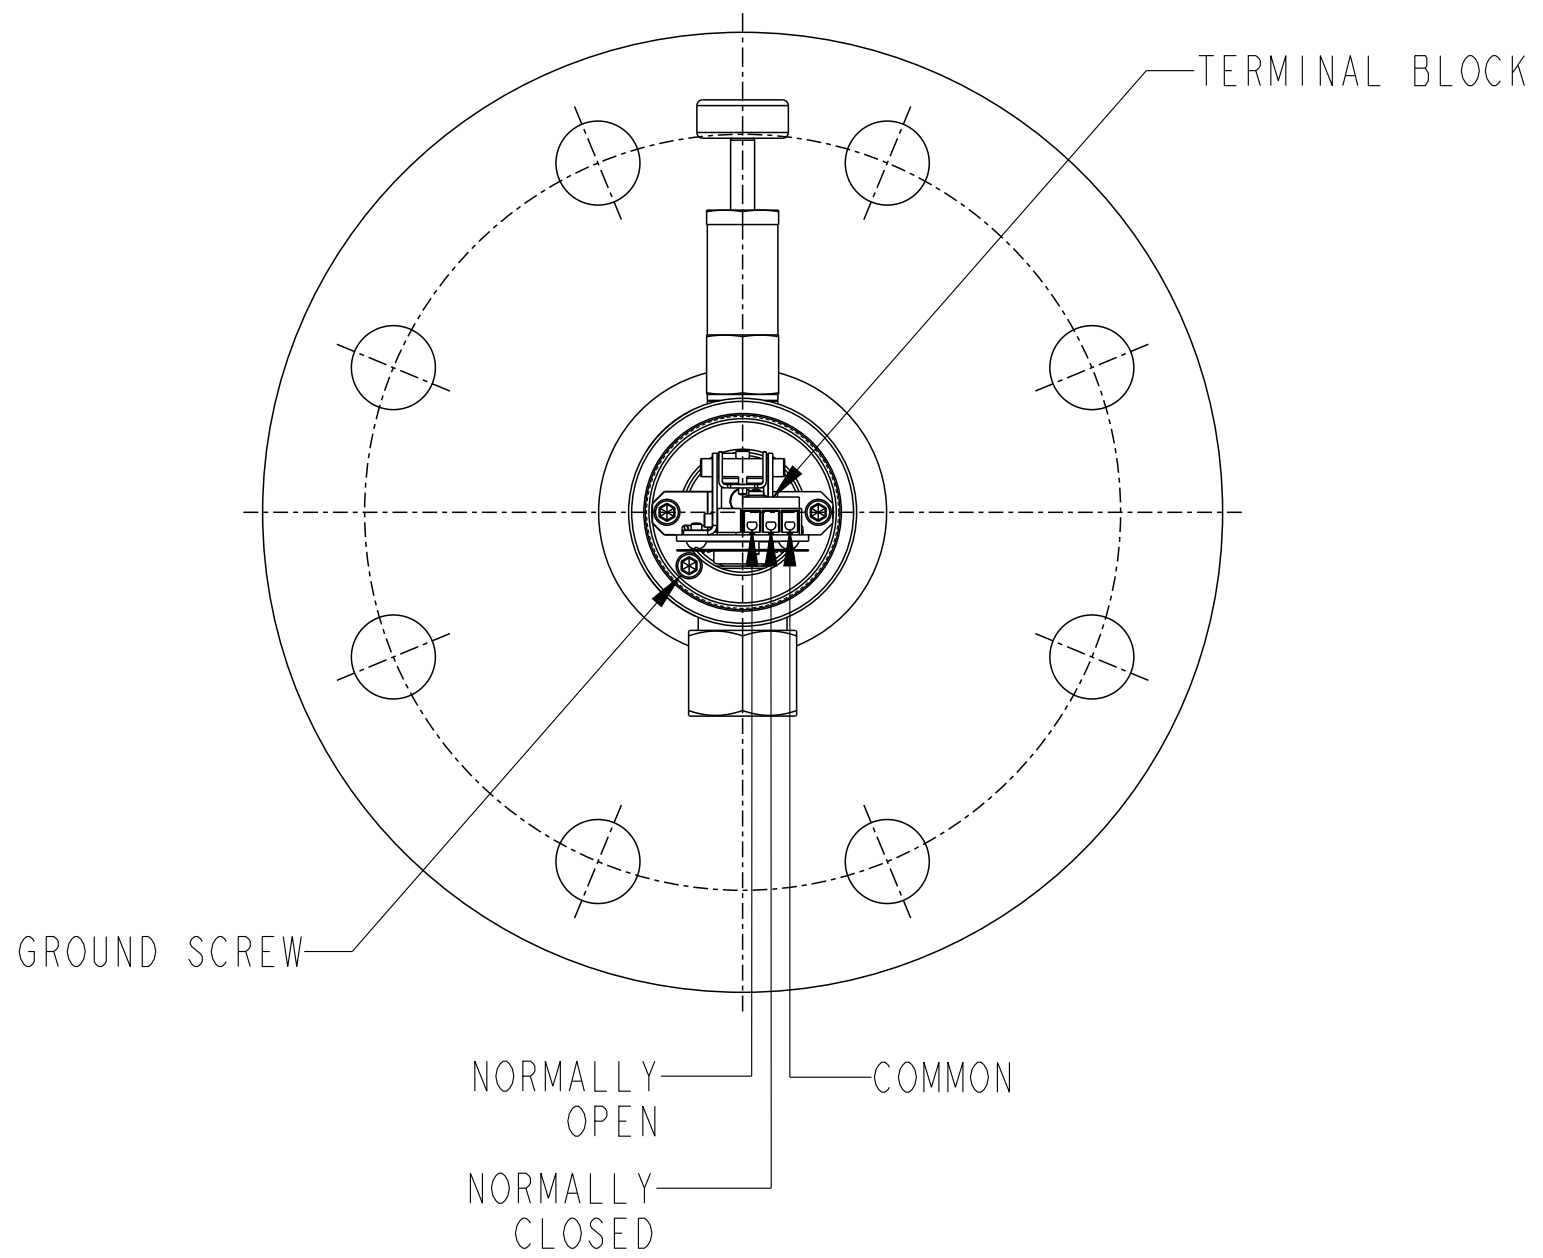

					DIM'S IN INCHES		Kenco		MATERIAL:			
					TOLERANCES UNLESS OTHERWISE SPECIFIED:		ENGINEERING		RELEASE LEVEL:		RELEASED	
A	8/02/24	BRC	RELEASED			ANGULAR ±1/2°		Tulsa, Oklahoma, USA		DRAWING CREATED IN PRO/ENGINEER		
	N/A	DS				FRACTIONAL ±1/64"		TITLE:				
REV.	DATE	DRN.	DESCRIPTION			(X.X) ±0.015"		SWITCH, ELECTRIC FLOAT, 2000 PSI 8A SPDT FLANGED KEFS-TB (OUTLINE DRAWING)				
						(X.XX) ±0.010"						
	ECN	CHKD.				(X.XXX) ±0.005"						
PROPRIETARY: THIS DRAWING AND THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO KENCO ENGINEERING CO. AND SHALL NOT BE REPRODUCED, COPIED, OR DISCLOSED IN WHOLE OR IN PART, OR USED FOR MANUFACTURE OR FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF KENCO ENGINEERING.						MACH FILLT RND. .031"		DRN. BY: BRC		SCALE: 0.500		DRAWING NUMBER 94664
						125 MAX. FINISH, ALL MACHINED SURFACES.		CHKD. BY: DS		REVISION: A		
								DATE: 8/02/24		SHEET 1 OF 3		