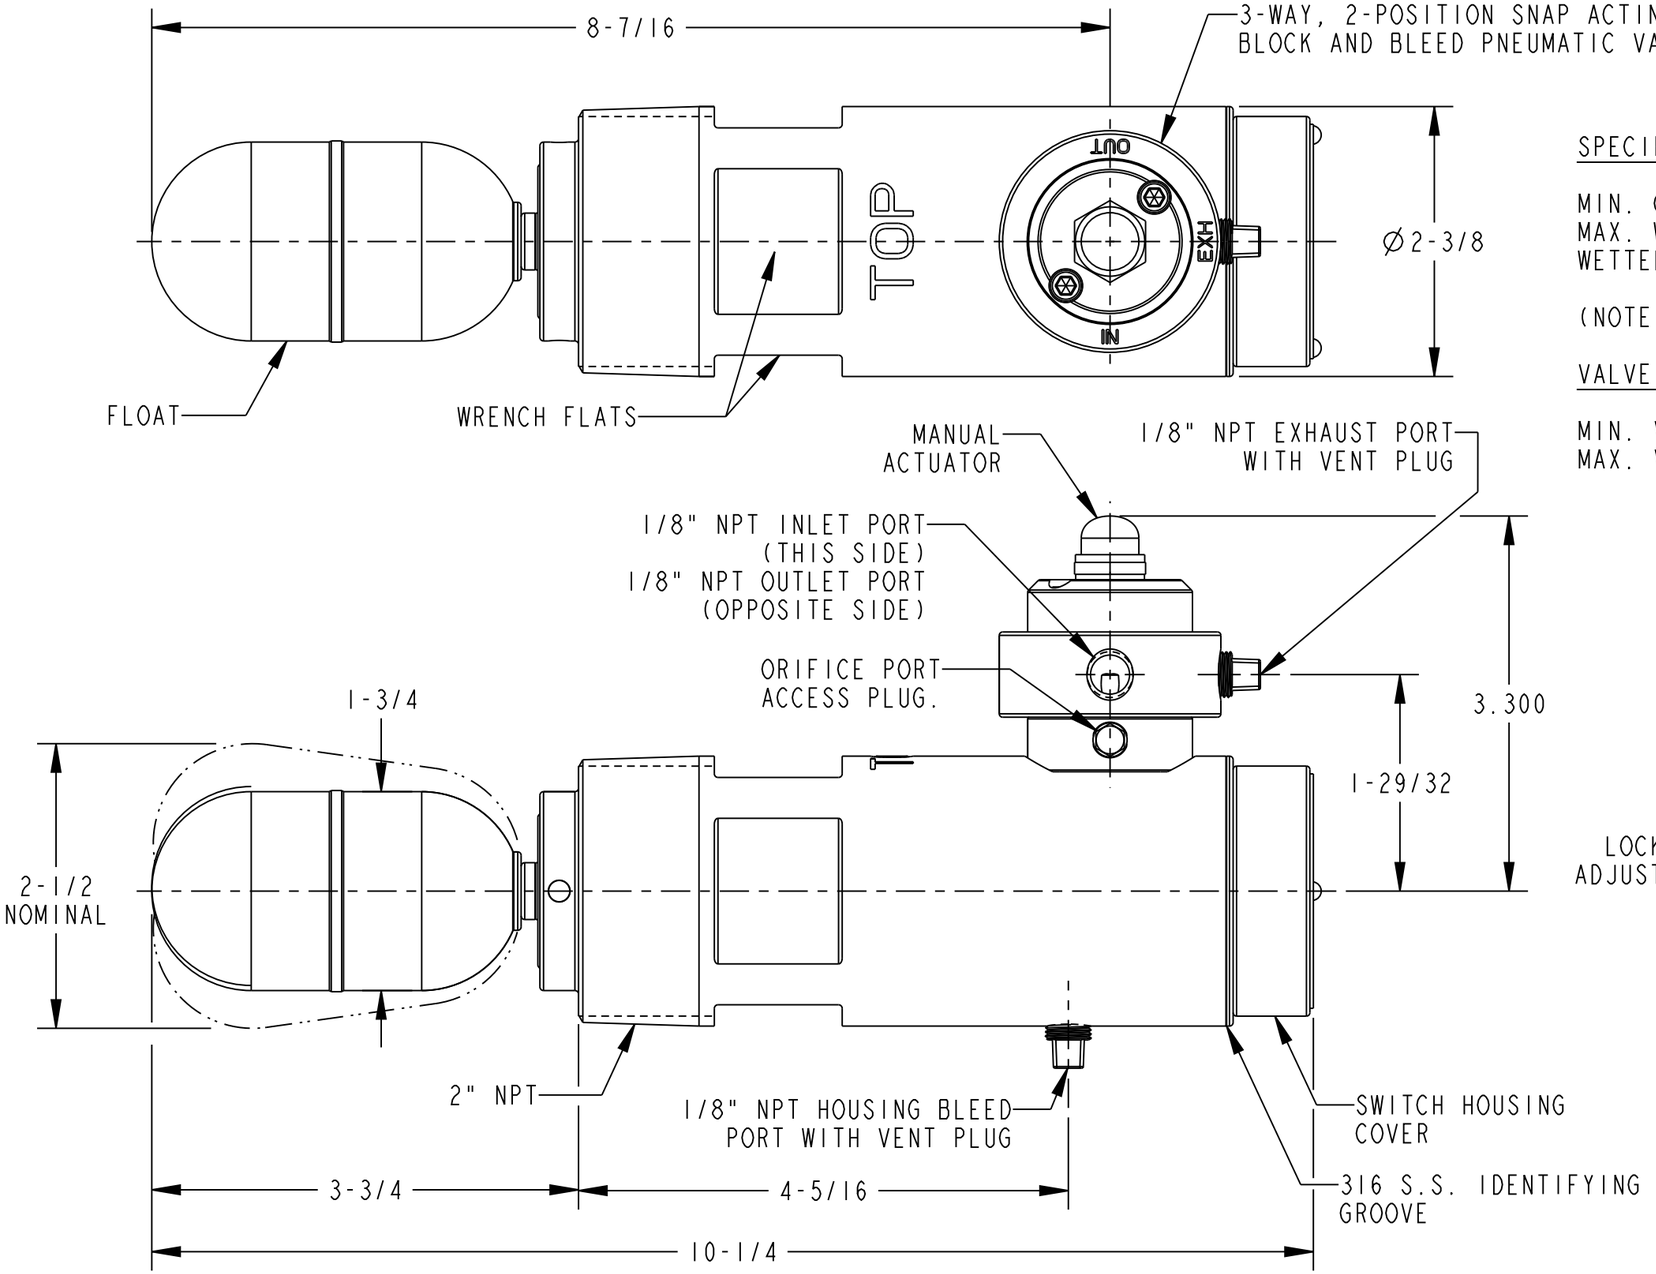

IMPORTANT: VALVE MUST BE PLUMBED WITH CLEAN (FILTERED), DRY AND REGULATED AIR OR INSTRUMENT QUALITY GAS.

SPECIFICATIONS:

MIN. OPERATING S.G.: .53
MAX. WORKING PRESSURE: 2000 PSI
WETTED MATERIALS: 303/304 STAINLESS STEEL (STANDARD)
316 STAINLESS STEEL (OPTIONAL)
(NOTE: ADD -S6 SUFFIX TO MODEL NUMBER FOR 316 OPTION.)

VALVE OPERATING PARAMETERS:

MIN. VALVE SUPPLY PRESSURE: 30 PSI
MAX. VALVE SUPPLY PRESSURE: 75 PSI

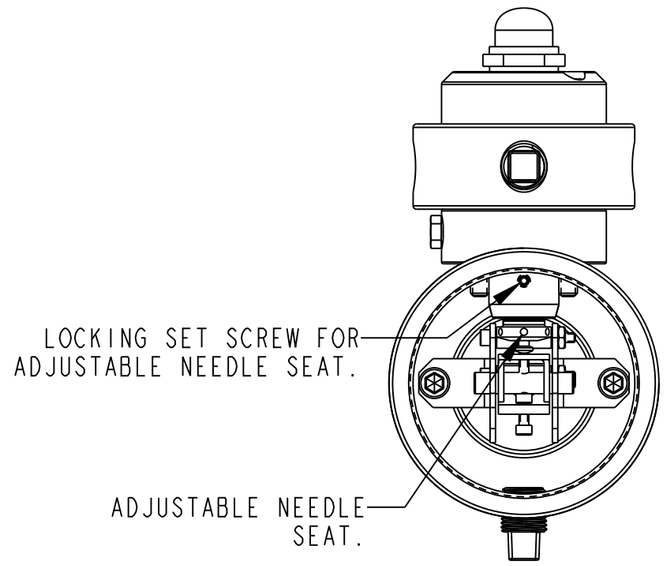

DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE AT ANY TIME WITHOUT NOTICE.

MODEL NO.: KPFS-2-LR-S6

REV.	DATE	DRN.	DESCRIPTION
B	02/01/18	BRC	UPDATED TO REFLECT ONE PIECE VALVE ASSEMBLY
	N/A	DS	
A	2/23/12	BRC	RELEASED
	N/A	RDM	
REV.	DATE	DRN.	DESCRIPTION
	ECN	CHKD.	

PROPRIETARY: THIS DRAWING AND THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO KENCO ENGINEERING CO. AND SHALL NOT BE REPRODUCED, COPIED, OR DISCLOSED IN WHOLE OR IN PART, OR USED FOR MANUFACTURE OR FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF KENCO ENGINEERING.

DIM'S IN INCHES
TOLERANCES UNLESS OTHERWISE SPECIFIED.
ANGULAR ±1/2°
FRACTIONAL ±1/64"
(X.X) ±0.015"
(X.XX) ±0.010"
(X.XXX) ±0.005"
MACH FILLET RAD-.031"
125 MAX. FINISH, ALL MACHINED SURFACES.

KENCO ENGINEERING
Tulsa, Oklahoma USA

MATERIAL:	SEE B/M
RELEASE LEVEL:	RELEASED
	DRAWING CREATED IN PRO/ENGINEER

TITLE:
SWITCH, FLOAT KPFS (LEVEL RISING) 316 STAINLESS STEEL

DRN. BY:	BRC	SCALE:	0.750	DRAWING NUMBER
CHKD. BY:	RDM	REVISION:	B	62695-LR
DATE:	02/23/12	SHEET 1 OF 3		