



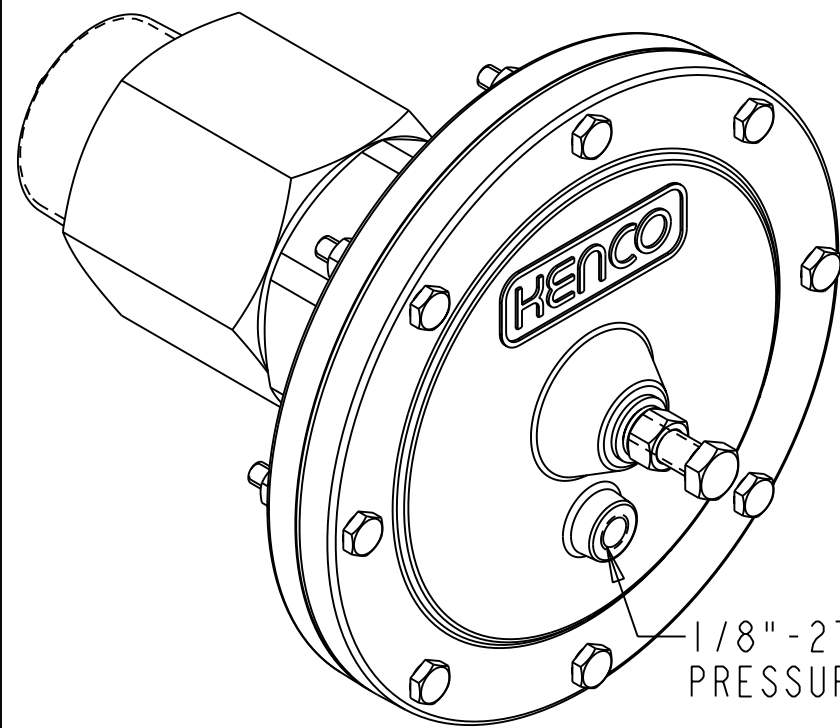

1/8"-27 NPT
PRESSURE INLET PORT

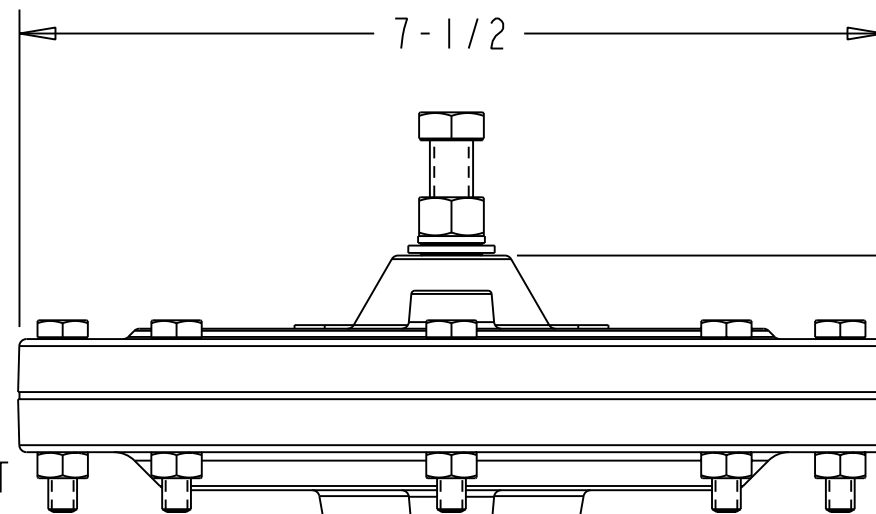


VENT PLUG
CONNECTION UNION

DRAIN
1"-11 1/2 NPT

PROCESS CONNECTION
2"-11 1/2 NPT

OPEN/CLOSE
INDICATOR BUTTON

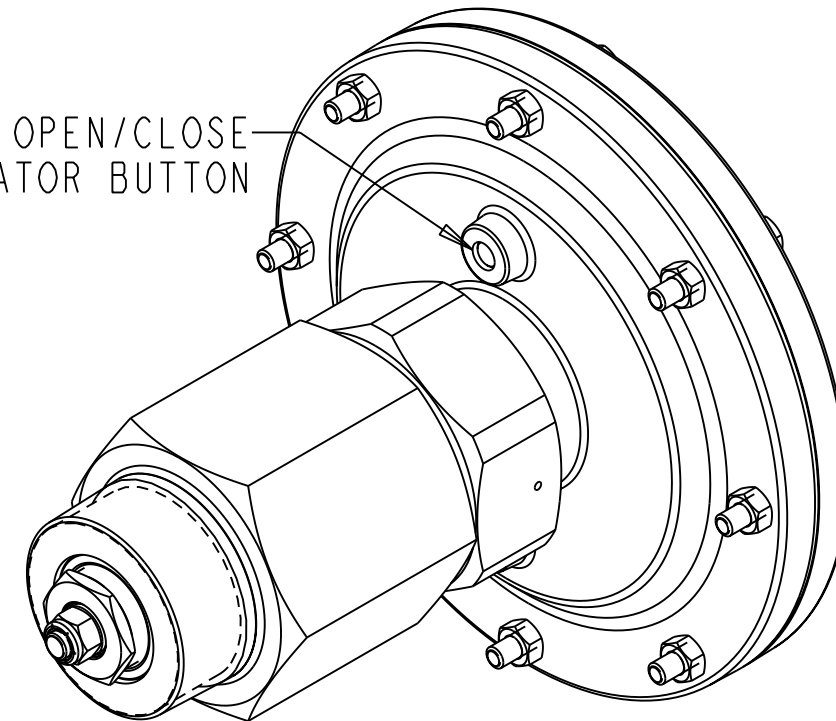

KDV-P05-2-1

PRESSURE RATING: 500 PSI
MAXIMUM VALVE RELEASE PRESSURE: 35 PSI
OPERATING TEMPERATURE: -30 TO 250°F
INTERNAL WETTED PARTS: 303 STAINLESS STEEL
TRIM PLUG SEAL: HIGH PERFORMANCE POLYURETHANE
BODY: ELECTROLESS NICKEL PLATED CARBON STEEL

				DIM'S IN INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED.	KENCO ENGINEERING Tulsa, Oklahoma USA TITLE: VALVE, DUMP KDV-P05-2-1 DRN. BY: BRC SCALE: 0.600 CHKD. BY: PMM REVISION: A DATE: 03-06-08 SHEET 1 OF 3	MATERIAL:	SEE B/M
						RELEASE LEVEL:	RELEASED
A	3/06/08 N/A	BRC PMM	RELEASED			DRAWING CREATED IN PRO/ENGINEER	
REV.	DATE	DRN.	DESCRIPTION				
	ECN	CHKD.					
PROPRIETARY: THIS DRAWING AND THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO KENCO ENGINEERING CO. AND SHALL NOT BE REPRODUCED, COPIED, OR DISCLOSED IN WHOLE OR IN PART, OR USED FOR MANUFACTURE OR FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF KENCO ENGINEERING.							